


# Pillow case dress

by  
Anna  
Marie



1. Wash and press pillow case (of course!)
2. Fold case in half and cut armholes from outer corners at opposite end of case opening. From top of armhole - cut a gentle curve towards the center fold. (see figure a.)



3. Measure arm hole (from end to end) - then cut 2 bias strips that are the long and 1" wide. (see figure b.)
4. With right sides together sew w/  $\frac{1}{4}$ " SA. the strip onto the arm hole. Repeat on other side (see c.)



5. Turn strip up, then wrap around SA to meet stitch line. (see d.)

6. Turn down once more towards inside so that the seam is on the top edge of armhole and stitch down (see e.)




7. measure front opening (and back) and cut bias  $1\frac{1}{2}$ " wide plus 1" longer in length than the measurement. (see f.)

8. Press one edge of bias down  $\frac{1}{4}$ " (see g.)




9. Sew unpressed edge of bias along top edge of front w/  $\frac{1}{2}$ " SA. Be sure that you let the excess length of the bias hang off at each end a bit (see h.)

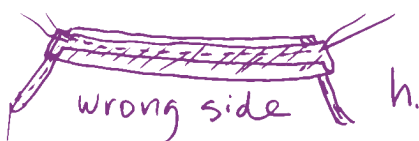

10. Repeat 9. on Back side top edge.

11. Press the Bias edge up and also press the ends inward towards wrong side of bias. (see i)  
(Do this with the right side of the bias against wrong side of front.)

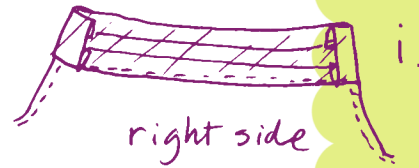

12. Turn pressed bias down towards right side of front and topstitch down on the very bottom edge of the bias to leave a casing (see j) Repeat 11 & 12. on back side.



13. Cut 2 strips 40" x 3".



14. Fold in half lengthwise and sew ends and along length leaving and opening in the stitching to pull through. (see k.)

15. Repeat 14. on other strip and press the strips.

16. Use a large safety pin in the end of straps to feed through front and back casings.